

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93



ENERGETIC CLEAN

THE EASIEST WAY TO CLEAN THE FILTER

The new NRG range ensures constant high suction performances thanks to the Semi-Automatic Filter Cleaning System. The system can be manually activated by pressing "CLEAN" button. For maximum efficiency you can also press the flexible hose against the specific hole or cover it with your hand. The NRG range can be used for general applications and removing both dust and liquids. Compared to normal vacuum cleaners, this system enables you to quickly clean the filter without removing it from the vacuum.

EASY TO USE

Press button to activate the filter cleaning system



HIGH EFFICIENCY FILTER CLEANING SYSTEM

BENEFITS

- 01 The CLEAN system can be activated manually, by simply pressing a button.
It's possible to clean the cartridge without opening the head and avoiding the contact with dirty waste
- 02 Collected material and dust are not dispersed in the environment while cleaning the filter
- 03 The system delays the filter clogging, extending its durability
- 04 Filtration efficiency can be quickly restored
- 05 No electronics, the system works with resistant mechanical devices only



CYCLONE

NO LOSS OF SUCTION POWER AND FILTER ALWAYS CLEAN

Unlike other dust extractors, our Cyclone technology allows you to extract dust, sludge and hot mastic without damaging or compromising the cleaning system and the filters life cycle. With NO filters to unclog, you have NO filters to clean. A guaranteed high productivity and suction performance until tank capacity is full. Ideal for vacuuming through puddles or extracting fragmented debris



**NO FILTERS
TO CLOG
NO FILTERS
TO CLEAN**

BENEFITS

- 01 No electronic switches, no sensors and no control panels = no hassle
- 02 HEPA cartridge will always be clean ensuring the highest filtration efficiency level
- 03 Decanter facilitates fine dust disposal by simply replacing the microfiber bag without any contact with waste material
- 04 A specifically designed structure enabling the collection of large volumes of material



TELECONTROL



REMOTE CONTROL

With the Remote Control feature, when power tool is plugged into the motorhead socket and started, the vacuum will start accordingly and it will automatically shut off when tool trigger is released. The integrated additional socket accepts different tools: power tools up to 2600 Watt ; air operated tools up to 7 bar.

BENEFITS

01

By connecting the tool with the machine the operator has a clearer view of the working surface and can work faster and more precisely

02

No need to clean after work means no dirt on other surfaces

03

It safeguards your health, because dangerous dust is immediately extracted

04

"Versatile and double use operation system:

1. Auto-Start function through power tool;
2. Standard cleaning operation using accessories



M FILTER CLASSIFICATION



MEDIUM HAZARD RECOVERY

Certified by qualified laboratories, M-Class filtration and containment [99,5% dust containment] are set on our dust extractors and tested entirely as an assembled filter unit, instead of testing the cartridges only. Integrated alarm system which prevents filter overpressure.


BENEFITS

01

Useful for dangerous dust



PCB PREFILTER

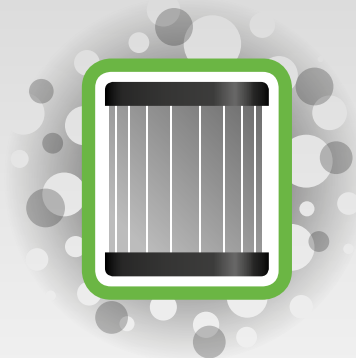

CARTRIDGE PROTECTION

Several testings on filtration criteria enable to rank our PCB Prefilter as the easiest and most efficient additional protection for high efficiency cartridges, preventing fast blockage caused by fine dust recovery.

BENEFITS

01

PCB prefilter allows the dispersion of electrostatic charges

02


PCB prefilter prevents standard filter from getting quickly clogged

03

PCB is easily washable and restorable efficiency



**MICROFIBER
BAG**

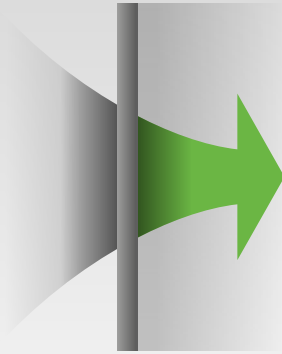

HIGH EFFICIENCY FILTRATION

Safe containment bags, rip&rupture resistant, easy disposal, preventing inhalation of dangerous dust.

BENEFITS

01

Great resistance to rips and ruptures

02


Safe containment of fine dust to avoid inhalation during disposal

03

Dust emission reduction of exhausting air



**RELIABLE
CONSTRUCTION
FOR INTENSIVE
USE**



MAXIMUM SIMPLICITY AND COST SAVINGS

Our goal is to design and manufacture high quality, reliable and durable vacuum cleaners suitable for an intensive use. 40 years of experience and integrated vertical production led us to reach the maximum level of control concerning the design and production of all our accessories: flexible hoses, plastic and inox tanks, frameworks and powerheads with a wide range of electrical configurations, in compliance with international standards.

BENEFITS

01

A complete range of products for any competitive application

02

Faster prioritized production and fast delivery

03

Easy interchangeable filters, spare parts and accessory kits



**ESD
COMPLIANCE**



GROUNDING

Static and fully dissipative features, in compliance with IEC 61340-5-1 which protect sensitive electronic components from electrostatic discharges.

BENEFITS

01

Possibility to work in Electronic Protected Areas EPA

CONSTRUCTION INDUSTRY



CONSTRUCTION INDUSTRY

- ▶ RESIDUALS FROM WALLS/FLOORS CUTTINGS
- ▶ SUCTION OF MASONRY SCRAPS
- ▶ CLEANING OF BAGS ACCIDENTAL SPILLINGS

RENOVATION

- ▶ DUSTS PRODUCED BY BEAM OR WINDOWS FIXTURES SMOOTHING PROCESSES
- ▶ RESIDUALS FROM WALLS SMOOTHING PROCESSES
- ▶ FLOORS SMOOTHING SCRAPS

RECLAMATION

- ▶ ASBESTOS REMOVAL
- ▶ DISPOSAL OF BULKY MATERIAL
- ▶ SUCTION OF WET MATERIAL

HARDWARE & AUTOMOTIVE



DIY

- ▶ SURFACES PUNCTURE
- ▶ WOOD CUTTING & SMOOTHING
- ▶ FILING OF METALLIC OBJECTS

PLANT DESIGN

- ▶ SCRAPS PRODUCED BY CREATION OF CONDUITS FOR ELECTRICAL SYSTEMS
- ▶ SCRAPS PRODUCED BY CORE SAMPLING FOR GAS PLANTS CREATION
- ▶ MASONRY SCRAPS IN PLUMBING FIELD

CAR REPAIR AND MANUFACTURING

- ▶ REPAIRS SCRAPS
- ▶ SURFACE RIFINING RESIDUALS
- ▶ PAINTING REMOVAL

HEAVY INDUSTRY



WINDOWS&DOORS MANUFACTURERS

- ▶ DOORS&WINDOWS SMOOTHING
- ▶ WOOD CUTTING&PUNCTURING
- ▶ METAL SHEETS MANUFACTURE

FURNITURE FACTORIES

- ▶ WOOD CUTTING&REFINING
- ▶ METAL SHEETS MANUFACTURE
- ▶ RAW MATERIALS RECOVERY

NAVAL AND AVIATION

- ▶ CARPENTRY MANUFACTURE
- ▶ COVERINGS MAINTENANCE
- ▶ REMOVAL OF SURFACE TREATMENTS

AGRICULTURE AND FACTORIES



GENERAL MAINTENANCE

- ▶ MECHANICAL WORKSHOPS
- ▶ SUCTION OF BULKY PRODUCTION SCRAPS
- ▶ WAREHOUSE CLEANING

EMERGENCY RECOVERY

- ▶ PLANTS LEAKS REMOVAL
- ▶ CLEANING OF BREEDING FARMS SCRAPS
- ▶ ACCIDENTAL SPILLINGS RECOVERY



VACUUM CLEANERS - DUST EXTRACTORS - BASIC TOOLINGS

NEW

YS 1/20 W&D TC

POWER MAX

1400 W

WATER LIFT

1735
mmH₂O

AIRFLOW

108 m³/h

TANK CAPACITY

20 l

EXCLUSIVE CHARACTERISTICS

- ▶ TELECONTROL
- ▶ 2 IN 1 DOUBLE USE
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MULTI STAGE FILTRATION



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



SPECS



SOCKET FOR POWER TOOL
WITH AUTOMATIC
START/STOP (TC)



MICROFIBER BAG



BLOWING DEVICE

TECHNICAL DATA

YS 1/20 W&D TC		
Code	ASD013049	
PERFORMANCE		
Usage	WET & DRY	
Motor	1	
Power	W	1200-1400 max [2000 W additional plug]
Voltage	V	220-240
Water lift	mmH ₂ O	1735
Airflow	m ³ /h	108
Tank Capacity/Material	l	20/steel
Cable length	m	5
Filtering surface	cm ²	2000
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	78
Diameter of accessories	mm	32
Dimensions (LxWxH)	mm	420x380x490
Weight	kg	6,0

STANDARD EQUIPMENT

CODE: FTDP00764
HEPA CARTRIDGE



CODE: -
MICROFIBER BAG



CODE: TBFX00994
FLEXIBLE HOSE 1 M WITH
CURVED WAND



CODE: TBFX00988
ALUMINIUM TUBES 3 PCS



CODE: SPPV02203
WET & DRY FLOOR TOOL



CODE: KTRI02538
FLAT LANCE + BRISTLE
BRUSH



CODE: MPVR11515
ADAPTOR



OPTIONAL ACCESSORIES

CODE: KTRI04755
MICROFIBER BAG



X5

CODE: MPVR11542
COVER FOR DRILL





VACUUM CLEANERS - DUST EXTRACTORS - PROFESSIONAL TOOLINGS

GS 1/33 M TC GS 1/33 M PN

POWER MAX

1200 W

WATER LIFT

2470
mmH₂O

AIRFLOW

210 m³/h

TANK CAPACITY

33 l

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ SCREWING CONNECTION
- ▶ TELECONTROL
- ▶ M FILTER CLASSIFICATION
- ▶ PCB PREFILTER
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MULTI STAGE FILTRATION
- ▶ AIR SUPPLY CONTROL AND ELECTROVALVES (FOR GS 1/33 M PN)
- ▶ DOUBLE STAGE MOTOR
- ▶ ELECTROSTATIC DISSIPATION



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



BLACK
IS
GREEN™

SPECS



SOCKET FOR POWER TOOL (TC) AND/OR PNEUMATIC TOOL (PN) WITH AUTOMATIC START/STOP



WARNING LIGHT FOR SPEED CONTROL > 20M/S



HIGH EFFICIENCY H13 HEPA CARTRIDGE 10.500 CM²

TECHNICAL DATA

Code	GS 1/33 M TC		GS 1/33 M PN	
	ASD015107		ASD015110	
PERFORMANCE				
Usage	DRY		DRY	
Motor	1		1	
Power	W	1000-1200 max (2600 W additional plug)	W	1000-1200 max
Voltage	V	220-240	V	220-240
Water lift	mmH ₂ O	2470	mmH ₂ O	2500
Airflow	m ³ /h	210	m ³ /h	210
Tank Capacity/Material	l	33/steel	l	33/steel
Cable length	m	8,5	m	8,5
Filtering surface	cm ²	10.500	cm ²	10.500
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	72	dB(A)	75
Diameter of accessories	mm	36	mm	36
Dimensions (LxWxH)	mm	380x380x650	mm	380x380x650
Weight	kg	12,0	kg	12,0

STANDARD EQUIPMENT

CODE: FTDP00322
HEPA H13 CARTRIDGE



CODE: FTDP00579
MICROFIBER BAG



PMDT01000 ACCESSORIES KIT Ø36 MM COMPOSED OF:

CODE: TBFX01500
CONDUCTIVE FLEXIBLE
HOSE 4 M



CODE: MPVR85407
PLASTIC TUBE 2X50 CM



CODE: LAFN85073
HAND WITH AIR
REGULATOR



CODE: SPPV33288
DUST TOOL



CODE: SPPV28242
FLAT LANCE



CODE: SPPV28243
ROUND BRUSH



CODE: MPVR06998
TOOL ADAPTER



PMDT01001 ACCESSORIES KIT Ø36 MM FOR GS 1/33 M PN COMPOSED OF:

CODE: TBFX01500
CONDUCTIVE FLEXIBLE
HOSE 4 M



CODE: MPVR85407
PLASTIC TUBE 2X50 CM



CODE: LAFN85073
HAND WITH AIR
REGULATOR



CODE: SPPV33288
DUST TOOL



CODE: SPPV28242
FLAT LANCE



CODE: SPPV28243
ROUND BRUSH



CODE: MPVR06998
TOOL ADAPTER



CODE: TBBP00655
ELASTORAN HOSE 4,5M



CODE: MPVR85445
CLIP (9 PCS)



OPTIONAL ACCESSORIES

CODE: FTDP00580
PAPER BAG CLASS M



CODE: RCVR00936
COMPLETE CAP FOR INLET
(FOR SAFE DISPOSAL)



CODE: MPVR11542
COVER FOR DRILL





VACUUM CLEANERS - DUST EXTRACTORS - PROFESSIONAL TOOLINGS

GS 2/62 M TCPN

POWER MAX

2400 W

WATER LIFT

2470
mmH₂O

AIRFLOW

420 m³/h

TANK CAPACITY

62 l

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ SCREWING CONNECTION
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ TELECONTROL
- ▶ M FILTER CLASSIFICATION
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MULTI STAGE FILTRATION
- ▶ AIR SUPPLY CONTROL AND ELECTROVALVES
- ▶ DOUBLE STAGE MOTORS
- ▶ ELECTROSTATIC DISSIPATION



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



BLACK
IS
GREEN™

SPECS



SOCKET FOR POWER TOOL (TC) AND/OR PNEUMATIC TOOL (PN) WITH AUTOMATIC START/STOP



WARNING LIGHT FOR SPEED CONTROL > 20M/S



HIGH EFFICIENCY H13 HEPA CARTRIDGE 10.500 CM²

TECHNICAL DATA

GS 2/62 M TCP N		
Code	ASD015108	
PERFORMANCE		
Usage	DRY	
Motor	2	
Power	W	2000-2400 max (1300 W additional plug)
Voltage	V	220-240
Water lift	mmH ₂ O	2470
Airflow	m³/h	420
Tank Capacity/Material	l	62/steel
Cable length	m	8,5
Filtering surface	cm²	10.500
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	74
Diameter of accessories	mm	36
Dimensions (LxWxH)	mm	550x600x960
Weight	kg	21.0

STANDARD EQUIPMENT

CODE: FTDP00322
HEPA H13 CARTRIDGE



CODE: FTDP00608
MICROFIBER BAG



PMDT01001 ACCESSORIES KIT Ø36 MM COMPOSED OF:

CODE: TBFX01500
CONDUCTIVE FLEXIBLE
HOSE 4 M



CODE: TBBP00655
ELASTORAN HOSE 4,5 M



CODE: MPVR85445
CLIP (9 PCS)



CODE: MPVR85407
PLASTIC TUBE 2X50 CM



CODE: LAFN85073
HAND WITH AIR
REGULATOR



CODE: SPPV33288
DUST TOOL



CODE: SPPV28242
FLAT LANCE



CODE: SPPV28243
ROUND BRUSH



CODE: MPVR06998
TOOL ADAPTER



OPTIONAL ACCESSORIES

CODE: FTDP40007
PAPER BAG CLASS M



CODE: RCVR00936
COMPLETE CAP FOR INLET
(FOR SAFE DISPOSAL)



CODE: MPVR11542
COVER FOR DRILL





VACUUM CLEANERS - DUST EXTRACTORS - PROFESSIONAL TOOLINGS

GS 1/33 H TC

NEW

POWER MAX

1200 w

WATER LIFT

2470
mmH₂O

AIRFLOW

210 m³/h

TANK CAPACITY

33 l

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ SCREWING CONNECTION
- ▶ TELECONTROL
- ▶ H FILTER CLASSIFICATION
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MULTI STAGE FILTRATION
- ▶ DOUBLE STAGE MOTOR
- ▶ COMPLIANCE WITH CLASS H CERTIFICATION
- ▶ HEPA H13 CARTRIDGE AND FILTERS SURFACE AREA
- ▶ FILTER OVERPRESSURE INDICATORS
- ▶ SAFETY DISPOSAL SYSTEMS
- ▶ RESISTANT FRAMEWORK AND INLET PLUG FOR SAFE TRANSFER
- ▶ ELECTROSTATIC DISSIPATION



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



SPECS



WARNING LIGHT FOR SPEED CONTROL > 20M/S



SOCKET FOR POWER TOOL (TC) AND/OR PNEUMATIC TOOL (PN) WITH AUTOMATIC START/STOP



FILTER BAG WITH SAFETY VALVE FOR DISPOSAL

TECHNICAL DATA

Code		GS 1/33 H TC
PERFORMANCE		ASD015514
Usage		DRY
Motor		1
Power	W	1000-1200 max [2600 W additional plug]
Voltage	V	220-240
Water lift	mmH ₂ O	2470
Airflow	m ³ /h	210
Tank Capacity/Material	l	33/steel
Cable length	m	8,5
Filtering surface	cm ²	12.000
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	72
Diameter of accessories	mm	36
Dimensions (LxWxH)	mm	380x380x650
Weight	kg	12,0

STANDARD EQUIPMENT

CODE: FTDP40006
HEPA H13 CARTRIDGE



CODE: FTDP00327
NON-WOVEN BAG WITH
SAFE VALVE



PMDT01000 ACCESSORIES KIT Ø36 MM COMPOSED OF:

CODE: TBFX01500
CONDUCTIVE FLEXIBLE
HOSE 4 M



CODE: MPVR85407
PLASTIC TUBE 2X50 CM



CODE: LAFN85073
HAND WITH AIR
REGULATOR



CODE: SPPV33288
DUST TOOL



CODE: SPPV28242
FLAT LANCE



CODE: SPPV28243
ROUND BRUSH



CODE: MPVR06998
TOOL ADAPTER



OPTIONAL ACCESSORIES

CODE: FTDP00580
PAPER BAG CLASS M



CODE: RCVR00936
COMPLETE CAP FOR INLET
(FOR SAFE DISPOSAL)



CODE: MPVR11542
COVER FOR DRILL





VACUUM CLEANERS - DUST EXTRACTORS - PROFESSIONAL TOOLINGS

GS 2/62 H TC PN

NEW

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ SCREWING CONNECTION
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ TELECONTROL
- ▶ H FILTER CLASSIFICATION
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MULTI STAGE FILTRATION
- ▶ DOUBLE STAGE MOTOR
- ▶ AIR SUPPLY CONTROL AND ELECTROVALVES
- ▶ COMPLIANCE WITH CLASS H CERTIFICATION
- ▶ HEPA H13 CARTRIDGE AND FILTERS SURFACE AREA
- ▶ FILTER OVERPRESSURE INDICATORS
- ▶ SAFETY DISPOSAL SYSTEMS
- ▶ RESISTANT FRAMEWORK AND INLET PLUG FOR SAFE TRANSFER
- ▶ ELECTROSTATIC DISSIPATION

POWER MAX	WATER LIFT	AIRFLOW	TANK CAPACITY
2400 W	2470 mmH ₂ O	420 m ³ /h	62 l



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



BLACK
IS
GREEN™

SPECS



WARNING LIGHT FOR SPEED CONTROL > 20M/S



SOCKET FOR POWER TOOL (TC) AND/OR PNEUMATIC TOOL (PN) WITH AUTOMATIC START/STOP



FILTER BAG WITH SAFETY VALVE FOR DISPOSAL

TECHNICAL DATA

GS 2/62 H T C P N		
ASD015515		
Code		
PERFORMANCE		
Usage		DRY
Motor		2
Power	W	2000-2400 max [1300 W additional plug]
Voltage	V	220-240
Water lift	mmH2O	2470
Airflow	m3/h	420
Tank Capacity/Material	l	62/steel
Cable length	m	8,5
Filtering surface	cm2	12.000
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	74
Diameter of accessories	mm	36
Dimensions (LxWxH)	mm	550x600x960
Weight	Kg	21,0

STANDARD EQUIPMENT

CODE: FTDP40006
HEPA H13 CARTRIDGE



CODE: FTDP40008
MICROFIBER BAG



PMDT01001 ACCESSORIES KIT Ø36 MM COMPOSED OF:

CODE: TBFX01500
CONDUCTIVE FLEXIBLE
HOSE 4 M



CODE: TBBP00655
ELASTORAN HOSE 4,5 M



CODE: MPVR85445
CLIP (9 PCS)



CODE: MPVR85407
PLASTIC TUBE 2X50 CM



CODE: LAFN85073
HAND WITH AIR
REGULATOR



CODE: SPPV33288
DUST TOOL



CODE: SPPV28242
FLAT LANCE



CODE: SPPV28243
ROUND BRUSH



CODE: MPVR06998
TOOL ADAPTER



OPTIONAL ACCESSORIES

CODE: FTDP40007
PAPER BAG CLASS M



CODE: RCVR00936
COMPLETE CAP FOR INLET
(FOR SAFE DISPOSAL)



CODE: MPVR11542
COVER FOR DRILL





VACUUM CLEANERS - DUST EXTRACTORS - PROFESSIONAL TOOLINGS

PS 1/41 M TC PS 1/41 M PN

POWER MAX

1200 W

WATER LIFT

2470
mmH₂O

AIRFLOW

210 m³/h

TANK CAPACITY

41 l

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ SCREWING CONNECTION
- ▶ TELECONTROL
- ▶ M FILTER CLASSIFICATION
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MULTI STAGE FILTRATION
- ▶ DOUBLE STAGE MOTOR
- ▶ AIR SUPPLY CONTROL AND ELECTROVALVES (FOR GS 1/41 M PN)
- ▶ ELECTROSTATIC DISSIPATION



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



BLACK
IS
GREEN™

SPECS



TRAY FOR TOOLS



MICROFIBER BAG



SOCKET FOR POWER TOOL (TC) AND/OR PNEUMATIC TOOL (PN) WITH AUTOMATIC START/STOP

TECHNICAL DATA

		PS 1/41 M TC	PS 1/41 MPN
Code		ASD015104	ASD015111
PERFORMANCE			
Usage		DRY	DRY
Motor		1	1
Power	W	1000-1200 max [2600 W additional plug]	1000-1200 max
Voltage	V	220-240	220-240
Water lift	mmH ₂ O	2470	2470
Airflow	m ³ /h	210	210
Tank Capacity/Material	l	41/steel	41/steel
Cable length	m	8,5	8,5
Filtering surface	cm ²	10.500	10.500
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	72	72
Diameter of accessories	mm	36	36
Dimensions (LxWxH)	mm	380x380x780	380x380x780
Weight	kg	14,0	14,0

STANDARD EQUIPMENT

CODE: FTDP00322
HEPA H13 CARTRIDGE



CODE: FTDP00463
MICROFIBER BAG



PMDT01000 ACCESSORIES KIT Ø36 MM FOR ASD015104 COMPOSED OF:

CODE: TBFX01500
CONDUCTIVE FLEXIBLE
HOSE 4 M



CODE: MPVR85407
PLASTIC TUBE 2X50 CM



CODE: LAFN85073
HAND WITH AIR
REGULATOR



CODE: SPPV33288
DUST TOOL



CODE: SPPV28242
FLAT LANCE



CODE: SPPV28243
ROUND BRUSH



CODE: MPVR06998
TOOL ADAPTER



PMDT01001 ACCESSORIES KIT Ø36 MM FOR ASD015111 COMPOSED OF:

CODE: TBFX01500
CONDUCTIVE FLEXIBLE
HOSE 4 M



CODE: TBBP00655
ELASTORAN HOSE 4,5 M



CODE: MPVR85445
CLIP (9 PCS)



CODE: MPVR85407
PLASTIC TUBE 2X50 CM



CODE: LAFN85073
HAND WITH AIR
REGULATOR



CODE: SPPV33288
DUST TOOL



CODE: SPPV28242
FLAT LANCE



CODE: SPPV28243
ROUND BRUSH



CODE: MPVR06998
TOOL ADAPTER



OPTIONAL ACCESSORIES

CODE: RCVR00936
COMPLETE CAP FOR INLET
(FOR SAFE DISPOSAL)



CODE: MPVR11542
COVER FOR DRILL





VACUUM CLEANERS - DUST EXTRACTORS - PROFESSIONAL TOOLINGS

PS 2/62 M TCPN

POWER MAX

2400 W

WATER LIFT

2470
mmH₂O

AIRFLOW

420 m³/h

TANK CAPACITY

62 l

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ SCREWING CONNECTION
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ TELECONTROL
- ▶ M FILTER CLASSIFICATION
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MULTI STAGE FILTRATION
- ▶ DOUBLE STAGE MOTORS
- ▶ AIR SUPPLY CONTROL AND ELECTROVALVES
- ▶ ELECTROSTATIC DISSIPATION



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



BLACK
IS
GREEN™

SPECS



TRAY FOR TOOLS



MICROFIBER BAG



SOCKET FOR POWER TOOL (TC) AND/OR PNEUMATIC TOOL (PN) WITH AUTOMATIC START/STOP

TECHNICAL DATA

PS 2/62 M T C P N		
ASD015105		
Code		
PERFORMANCE		
Usage	DRY	
Motor	2	
Power	W	2000-2400 max [1300 W additional plug]
Voltage	V	220-240
Water lift	mmH ₂ O	2470
Airflow	m ³ /h	420
Tank Capacity/Material	l	62/steel
Cable length	m	8,5
Filtering surface	cm ²	10.500
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	74
Diameter of accessories	mm	36
Dimensions (LxWxH)	mm	480x480x920
Weight	kg	21,0

STANDARD EQUIPMENT

CODE: FTDP00322
HEPA H13 CARTRIDGE



CODE: FTDP00608
MICROFIBER BAG



PMDT01001 ACCESSORIES KIT Ø36 MM COMPOSED OF:

CODE: TBFX01500
CONDUCTIVE FLEXIBLE
HOSE 4 M



CODE: TBBP00655
ELASTORAN HOSE 4,5 M



CODE: MPVR85445
CLIP (9 PCS)



CODE: MPVR85407
PLASTIC TUBE 2X50 CM



CODE: LAFN85073
HAND WITH AIR
REGULATOR



CODE: SPPV33288
DUST TOOL



CODE: SPPV28242
FLAT LANCE



CODE: SPPV28243
ROUND BRUSH



CODE: MPVR06998
TOOL ADAPTER



OPTIONAL ACCESSORIES

CODE: FTDP40007
PAPER BAG CLASS M



CODE: RCVR00936
COMPLETE CAP FOR INLET
(FOR SAFE DISPOSAL)



CODE: MPVR11542
COVER FOR DRILL





VACUUM CLEANERS - DUST EXTRACTORS - INTENSIVE TOOLINGS

NRG 1/20 CLEAN P

NEW

POWER MAX

1200 W

WATER LIFT

2100
mmH₂O

AIRFLOW

108 m³/h

TANK CAPACITY

20 l

EXCLUSIVE CHARACTERISTICS

- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MANUAL FILTER SHAKER
- ▶ MULTI STAGE FILTRATION

MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



ENERGETIC
CLEAN

SPECS



PRESS THE "CLEAN" BUTTON
TO CLEAN THE FILTER



FLAT SURFACE TO PUT TOOL
BOX



DRAIN VALVE FOR EASY AND
FAST TANK EMPTYING



TECHNICAL DATA

		NRG 1/20 CLEAN P
Code	ASD012994	
PERFORMANCE		
Usage	WET & DRY	
Motor	1	
Power	W	1200 max
Voltage	V	220-240
Water lift	mmH ₂ O	2100
Airflow	m ³ /h	108
Tank Capacity/Material	l	20/plastic
Cable length	m	5
Filtering surface	cm ²	3500
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	76
Diameter of accessories	mm	35
Dimensions (LxWxH)	mm	460x405x530
Weight	kg	10.0

STANDARD EQUIPMENT

CODE: FTDP00757

WASHABLE CARTRIDGE
E11 3.500 CM²



MICROFIBER BAG



ACCESSORIES KIT Ø35 MM COMPOSED OF:

CODE: TBFX01158

FLEXIBLE HOSE 2,5 M



CODE: LAFN85073

WAND WITH AIR
REGULATOR



CODE: LAFN11097

CHROMED TUBE 2 PCS



CODE: SPPV02192

WET & DRY FLOOR TOOL



CODE: SPPV02193

FLAT LANCE



CODE: SPPV02194

ROUND BRUSH



OPTIONAL ACCESSORIES

CODE: KTRI04966

MICROFIBER BAG SET OF
10 PCS



X10

CODE: MPVR11542

COVER FOR DRILL





VACUUM CLEANERS - DUST EXTRACTORS - INTENSIVE TOOLINGS

NEW

NRG 1/30 CLEAN P TC SL PT

NRG 1/30 CLEAN S TC SL PT

POWER MAX

WATER LIFT

AIRFLOW

TANK CAPACITY

1400 w

2270
mmH₂O

119 m³/h

30 l



EXCLUSIVE CHARACTERISTICS

- ▶ TELECONTROL
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MANUAL FILTER SHAKER
- ▶ MULTI STAGE FILTRATION



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



ENERGETIC
CLEAN



CONDUCTIVE
& STATIC
DISSIPATIVE
PLASTIC

SPECS



PRESS THE "CLEAN" BUTTON
TO CLEAN THE FILTER



SOCKET FOR POWER TOOL
WITH AUTOMATIC START/
STOP, LED WARNING, SPEED
REGULATOR



HIGH EFFICIENCY H13
CARTRIDGE 3.500 CM²

TECHNICAL DATA

		NRG 1/30 CLEAN P TC SL PT ASD012995	NRG 1/30 CLEAN S TC SL PT ASD013048
Code			
PERFORMANCE			
Usage		WET & DRY	WET & DRY
Motor		1	1
Power	W	1200-1400 max	1200-1400 max
Voltage	V	220-240	220-240
Water lift	mmH ₂ O	2270	2270
Airflow	m ³ /h	119	119
Tank Capacity/Material	l	30/plastic	30/steel
Cable length	m	8,5	8,5
Filtering surface	cm ²	3500	3500
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	76	76
Diameter of accessories	mm	35	35
Dimensions (LxWxH)	mm	460x405x670	460x405x670
Weight	kg	13,5	14,0

STANDARD EQUIPMENT

CODE: FTDP00758

**WASHABLE CARTRIDGE
HEPA H13 3.500 CM²**



MICROFIBER BAG



ACCESSORIES KIT Ø35 MM COMPOSED OF:

CODE: TBFX01159

**CONDUCTIVE FLEXIBLE
HOSE 2,5 M**



CODE: LAFN10880

**CONDUCTIVE WAND WITH
AIR REGULATOR**



CODE: LAFN11097

CHROMED TUBE 2 PCS



CODE: SPPV02192

WET & DRY FLOOR TOOL



CODE: SPPV02193

FLAT LANCE



CODE: SPPV02194

ROUND BRUSH



CODE: MPVR06998

TOOL ADAPTER



OPTIONAL ACCESSORIES

CODE: KTRI04967

**MICROFIBER BAG SET OF
10 PCS**



X10

CODE: MPVR11542

COVER FOR DRILL



CODE: FTDP28755

MESH FILTER





VACUUM CLEANERS - DUST EXTRACTORS - HEAVY TOOLINGS

NEW

GS 3/78 CYC

POWER MAX

3500 W

WATER LIFT

2230
mmH₂O

AIRFLOW

765 m³/h

TANK CAPACITY

78 l

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ TIPPING TROLLEY
- ▶ MICROFIBER BAG
- ▶ DETACHABLE TANK AND SOLID CART
- ▶ MULTI STAGE FILTRATION
- ▶ DOUBLE STAGE MOTORS
- ▶ ELECTROSTATIC DISSIPATION



MOST FREQUENTLY USE

AGRICULTURE



CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



INNOVATIONS



SPECS



MICROFIBER BAG PROTECTS THE CARTRIDGE



HEPA CARTRIDGE



CYCLONE SYSTEM

TECHNICAL DATA

Code		GS 3/78 CYC
PERFORMANCE		ASD015516
Usage		DRY
Motor		3
Power	W	3400-3500 max
Voltage	V	220-240
Water lift	mmH ₂ O	2230
Airflow	m ³ /h	765
Tank Capacity/Material	l	78/steel
Cable length	m	8,5
Filtering surface	cm ²	2260
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	76
Diameter of accessories	mm	50
Dimensions (LxWxH)	mm	680x620x1110
Weight	kg	33

STANDARD EQUIPMENT

CODE: FTDP28843
HEPA H13 CARTRIDGE
2.260 CM²



CODE: FTDP00462
MICROFIBER BAG 12 L



CODE: TBFX01139
CONDUCTIVE FLEXIBLE
HOSE 5 M Ø50 MM



OPTIONAL ACCESSORIES

CODE: KTRI04795
MICROFIBER BAG SET OF
10 PCS



X10



VACUUM CLEANERS - DUST EXTRACTORS - HEAVY TOOLINGS

NEW

GS 3/78 OPT CYC

POWER MAX

3500 w

WATER LIFT

2230
mmH₂O

AIRFLOW

765 m³/h

TANK CAPACITY

78 l

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ TIPPING TROLLEY
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ DETACHABLE TANK AND SOLID CART
- ▶ MULTI STAGE FILTRATION
- ▶ DOUBLE STAGE MOTORS
- ▶ BIG AND BRAKED WHEELS
- ▶ ELECTROSTATIC DISSIPATION



MOST FREQUENTLY USE

AGRICULTURE



CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



INNOVATIONS



SPECS



OPTIM TROLLEY IS EXTREMELY DURABLE AND MANEUVERABLE



CYCLONE SYSTEM



TIPPING TANK

TECHNICAL DATA

Code		GS 3/78 OPT CYC
PERFORMANCE		ASD015517
Usage		DRY
Motor		3
Power	W	3400-3500 max
Voltage	V	220-240
Water lift	mmH ₂ O	2230
Airflow	m ³ /h	765
Tank Capacity/Material	l	78/steel
Cable length	m	8,5
Filtering surface	cm ²	2260
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	76
Diameter of accessories	mm	50
Dimensions (LxWxH)	mm	600x620x1335
Weight	kg	43

STANDARD EQUIPMENT

CODE: FTDP28843
HEPA H13 CARTRIDGE
2.260 CM²



CODE: FTDP00462
MICROFIBER BAG 12 L



CODE: TBFX01139
CONDUCTIVE FLEXIBLE
HOSE 5 M Ø50 MM



OPTIONAL ACCESSORIES

CODE: KTRI04795
MICROFIBER BAG SET OF
10 PCS



X10



VACUUM CLEANERS - DUST EXTRACTORS - HEAVY TOOLINGS

NEW

G3 MBAG CYC

POWER MAX

3500 w

WATER LIFT

2230
mmH₂O

AIRFLOW

765 m³/h

BAG CAPACITY

20 m

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MULTI STAGE FILTRATION
- ▶ DOUBLE STAGE MOTORS
- ▶ BIG AND BRAKED WHEELS
- ▶ LONGOPAC®
- ▶ SELF DISCHARGE VALVE WITH BEST SEALING
- ▶ QUICK REPLACEMENT AND DETACHABLE SYSTEM
- ▶ ELECTROSTATIC DISSIPATION



MOST FREQUENTLY USE

AGRICULTURE



CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



INNOVATIONS



SPECS



LONGOPAC® COLLECTION SYSTEM



CYCLONE SYSTEM



HEPA CARTRIDGE

TECHNICAL DATA

Code		G3 MBAG CYC
PERFORMANCE		ASD015518
Usage		DRY
Motor		3
Power	W	3400-3500 max
Voltage	V	220-240
Water lift	mmH ₂ O	2230
Airflow	m ³ /h	765
Bag capacity	m	20
Cable length	m	8,5
Filtering surface	cm ²	2260
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	76
Diameter of accessories	mm	50
Dimensions (LxWxH)	mm	590x590x1770/1440
Weight	kg	42

STANDARD EQUIPMENT

CODE: FTDP28843
HEPA H13 CARTRIDGE
2.260 CM²



CODE: FTDP00462
MICROFIBER BAG 12 L



CODE: MISC00025
LONGOPAC®



CODE: TBFX01139
CONDUCTIVE FLEXIBLE
HOSE 5 M Ø50 MM



OPTIONAL ACCESSORIES

CODE: KTRI04795
MICROFIBER BAG SET OF
10 PCS



X10



VACUUM CLEANERS - DUST EXTRACTORS - HEAVY TOOLINGS

NEW

CYCLONE PRE-SEPARATOR

EXCLUSIVE CHARACTERISTICS

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ MICROFIBER BAG
- ▶ MULTI STAGE FILTRATION
- ▶ BIG AND BRAKED WHEELS
- ▶ LONGOPAC®
- ▶ SELF DISCHARGE VALVE WITH BEST SEALING
- ▶ QUICK REPLACEMENT AND DETACHABLE SYSTEM



MOST FREQUENTLY USE

CONSTRUCTION



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



CYCLONE

SPECS



LONGOPAC® COLLECTION SYSTEM



CYCLONE SYSTEM



MICROFIBER BAG PROTECTS THE CARTRIDGE

TECHNICAL DATA

Code		CYCLONE PRE-SEPARATOR	
PERFORMANCE		PMVR06389	
Usage		DRY	
Bag capacity	m	20	
Diameter of accessories	mm	50	
Dimensions (LxWxH)	mm	590x590x1570/1240	
Weight	kg	30	

STANDARD EQUIPMENT

CODE: FTDP28843
HEPA H13 CARTRIDGE
2.260 CM²



CODE: FTDP00462
MICROFIBER BAG 12 L



CODE: MISC00025
LONGOPAC[®]





VACUUM CLEANERS - DUST EXTRACTORS - INTENSIVE TOOLINGS

GP 1/37 M TC SP13 DRY GS 1/25 OPT M TC SP13

GP 1/37 M TC SP13 DRY

POWER MAX

1200

W

WATER LIFT

2480

mmH₂O

AIRFLOW

250

m³/h

TANK CAPACITY

37

l

GS 1/25 OPT M TC SP13

POWER MAX

1200

W

WATER LIFT

2300

mmH₂O

AIRFLOW

200

m³/h

TANK CAPACITY

25

l

EXCLUSIVE FEATURES

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ SP13 AUTOMATIC SYSTEM FOR FILTER CLEANING
- ▶ TELECONTROL
- ▶ M CLASS CERTIFIED
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MULTI STAGE FILTRATION
- ▶ DOUBLE STAGE MOTOR

DETACHABLE TANK

GP 1/37 M TC SP13 DRY

GS 1/25 OPT M TC SP13



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



BLACK
IS
GREEN™



AUTOMATIC FILTER
CLEANING SYSTEM
"SP13"

SPECS



ELECTRICAL FILTER SHAKER



ADDITIONAL SOCKET
FOR POWER TOOL WITH
AUTOMATIC START/STOP



WARNING LIGHT FOR SPEED
CONTROL > 20 M/S

TECHNICAL DATA

		GP 1/37 M TC SP13 DRY	GS 1/25 OPT M TC SP13
Code		ASD015120	ASD013652
PERFORMANCE			
Usage		Dry	DRY
Motor		1	1
Power	W	1000-1200 max (2600 W additional plug)	1000-1200 max
Voltage	V	220-240	220-240
Waterlift	mmH ₂ O	2480	2300
Airflow	m ³ /h	250	200
Tank capacity	l	37 / plastic	25/steel
Cable length	m	8,5	8
Filtering surface	cm ²	5000	5000
Sound pressure level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	72	72
Diameter of accessories	mm	36	36
Dimensions (lxwxh)	mm	380x380x700	550x650x1100
Weight	Kg	12	16

STANDARD EQUIPMENT

CODE: FTDP00367

POLYESTER CARTRIDGE
5.000 cm²



CODE: -

MICROFIBER BAG CLASS M



CODE: RCVR00936

COMPLETE CAP FOR INLET
(FOR SAFE DISPOSAL)
(ONLY FOR GS 1/25 OPT M
TC SP13)



CODE: PMDT01261 ACCESSORIES KIT Ø36 MM FOR GP 1/37 M TC SP13 DRY COMPOSED OF:

CODE: TBFX01500

CONDUCTIVE FLEXIBLE
HOSE 4 m



CODE: MPVR85407 (FOR 1 PC)

PLASTIC TUBE 50 cm
(MACHINE COMES WITH 2PCS)



CODE: LAFN10880

CONDUCTIVE WAND WITH
AIR REGULATOR



CODE: SPPV01771

DOUBLE USE BRUSH
Ø36 mm



CODE: SPPV28242

FLAT LANCE



CODE: SPPV28243

ROUND BRUSH



CODE: MPVR06998

TOOL ADAPTER



CODE: PMDT01000 ACCESSORIES KIT Ø36 MM FOR GS 1/25 OPT M TC SP13 COMPOSED OF:

CODE: TBFX01500

CONDUCTIVE FLEXIBLE
HOSE 4 m Ø36 mm



CODE: MPVR85407 (1 PC)

PLASTIC TUBE 50 CM (2 PCS)



CODE: LAFN10880

CONDUCTIVE WAND WITH
AIR REGULATOR Ø36 mm



CODE: SPPV33288

DUST TOOL Ø36 mm



CODE: SPPV28242

FLAT LANCE Ø36 mm



CODE: SPPV28243

ROUND BRUSH Ø36 mm



CODE: MPVR06998

TOOL ADATER



OPTIONAL ACCESSORIES

CODE: KTRI05204

MICROFIBER BAG CLASS M
(10 PCS)



X10

CODE: MPVR11542

COVER FOR DRILL



CODE: PMDT00411

ELECTRIC KIT Ø29 mm





VACUUM CLEANERS - DUST EXTRACTORS - INTENSIVE TOOLINGS

KLEEN 1/20 TC W&D

KLEEN 1/30 TC W&D

POWER MAX

1400

W

WATER LIFT

1900

mmH₂O

AIRFLOW

120

m³/h

TANK CAPACITY

20/30

l

EXCLUSIVE FEATURES

- ▶ TELECONTROL
- ▶ MICROFIBER BAG
- ▶ RELIABLE CONSTRUCTION FOR INTENSIVE USE
- ▶ MANUAL FILTER SHAKER
- ▶ MULTI STAGE FILTRATION
- ▶ BLOWING DEVICE
- ▶ GROWING SYSTEM



AVAILABLE FROM
APRIL 2021



MOST FREQUENTLY USE

CONSTRUCTION



HARDWARE CUSTOMER



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



BACK
FLOW

SPECS



PRESS THE BUTTON TO CLEAN
THE FILTER



SOCKET FOR POWER TOOL WITH
AUTOMATIC START/STOP



HIGH EFFICIENCY H13
CARTRIDGE 3500 CM²

TECHNICAL DATA

Code		KLEEN 1/20 TC W&D	KLEEN 1/30 TC W&D
PERFORMANCE		ASD013778	ASD013779
Usage		WET&DRY	WET&DRY
Motor		1	1
Power	W	1200-1400 max	1200-1400 max
Voltage	V	220-240	220-240
Water lift	mmH ₂ O	1900	1900
Airflow	m ³ /h	120	120
Tank Capacity/Material	l	20 - plastic	30 - steel
Cable length	m	8,5	8,5
Filtering surface	cm ²	3500	3500
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)	dB(A)	76	76
Diameter of accessories	mm	35	35
Dimensions (LxWxH)	mm	365x330x620	365x330x740
Weight	kg	9	9.5

STANDARD EQUIPMENT

CODE: FTDP00832
HEPA H13 CARTRIDGE
3.500 cm²



CODE: TBFX01313
FLEXIBLE HOSE 2.5 m
W/CURVED WAND AND
AIRFLOW REGULATOR
Ø36 mm



CODE: LAFN11510 (FOR 1 PC)
CHROMED TUBE Ø36
(MACHINE COMES WITH
2 PCS)



CODE: SPPV02592
DUST FLOOR TOOL Ø36



CODE: SPPV02593
WET FLOOR TOOL Ø36



CODE: SPPV02590
FLAT LANCE Ø36



CODE: SPPV02591
ROUND BRUSH Ø36



CODE: MPVR11515
TOOL ADAPTER Ø36



OPTIONAL ACCESSORIES

CODE: KTRI06080
MICROFIBER BAG (SET OF
10 PCS) (FOR 20 LT TANK)



X10

CODE: KTRI06081
MICROFIBER BAG (SET OF
10 PCS) (FOR 30 LT TANK)



X10

CODE: MPVR11542
COVER FOR DRILL





VACUUM CLEANERS - DUST EXTRACTORS - HEAVY TOOLINGS

NEW

GS 3 MBAG OPT CYC

POWER MAX

3500
W

WATER LIFT

2230
mmH₂O

AIRFLOW

765
m³/h

BAG CAPACITY

20
m

EXCLUSIVE FEATURES

- ▶ MAXIBAG COLLECTION SYSTEM
- ▶ DETACHABLE SYSTEM FOR QUICK REPLACEMENT OF MAXIBAG
- ▶ SELF DISCHARGE VALVE WITH BEST SEALING
- ▶ AISI 430 INDUSTRIAL FRAMEWORK
- ▶ BIG AND BRAKED WHEELS
- ▶ MULTI STAGE FILTRATION
- ▶ ELECTROSTATIC DISSIPATION
- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ INDEPENDENT MOTORS WITH LIGHT SWITCHES
- ▶ MICROFIBER BAG
- ▶ HEPA H13 CARTRIDGE
- ▶ RELIABLE COSTRUCTION FOR INTENSIVE USE



MOST FREQUENTLY USE

CONSTRUCTION



HEAVY INDUSTRY



INNOVATIONS



SPECS



SELF DISCHARGE VALVE



MAXIBAG COLLECTION SYSTEM



ALUMINIUM INLET

TECHNICAL DATA

		GS 3 MBAG OPT CYC	
Code		ASD013435	
PERFORMANCE			
Usage		DRY	
Motor		3	
Power	W	3400-3500 max	
Voltage	V	220-240	
Water lift	mmH ₂ O	2230	
Airflow	m³/h	765	
Bag capacity	m	20	
Cable length	m	8,5	
Filtering surface	cm²	2260	
Sound Pressure Level (EN 60704-1; EN 60704-2-1; IEC 60335-2-69)		76	
Diameter of inlet	mm	60 / metal	
Dimensions (LxWxH)	mm	600x620x1727	
Weight	kg	56	

STANDARD EQUIPMENT

CODE: MPVR28723 FASTENING PLASTIC RING	CODE: FTDP28843 HEPA H13 CARTRIDGE 2.260 cm ²	CODE: - MICROFIBER BAG 1PC	CODE: MISC00025 LONGOPAC®	CODE: TBFX01270 CONDUCTIVE FLEXIBLE HOSE 5 m Ø50 mm
				
CODE: LAFN49581 COMPLETE ALUMINIUM DOUBLE WAND Ø50 mm	CODE: SPPV01960 BRISTLE BRUSH Ø50 mm	CODE: SPPV49597 RUBBER FLAT LANCE Ø50 mm		
				

OPTIONAL ACCESSORIES

CODE: KTRI04795 MICROFIBER BAG SET OF 10 PCS	CODE: KTRI05290 CONDUCTIVE KIT 2 OPERATORS Ø38/60 mm	CODE: KTRI02735 CONDUCTIVE TOOL KIT Ø38 mm	CODE: SPPV37133 BRISTLE BRUSH Ø38 mm
 X10			
CODE: TBFX00933 CONDUCTIVE FLEXIBLE HOSE 10 m Ø50 mm			
			



VACUUM CLEANERS - DUST EXTRACTORS - HEAVY TOOLINGS

CYCLONE PRE-SEPARATOR MAXIBAG

A pre-separator is a collection device, simply connected with a vacuum cleaner to collect more powder and debris and if the filters in the vacuum are clogging too soon.
Benefits: More productivity and powder collection; Easier removal, handling and disposal of the debris.

EXCLUSIVE FEATURES

- ▶ INNOVATIVE GASKET
- ▶ STRONG HOOKS
- ▶ MICROFIBER BAG
- ▶ MULTI STAGE FILTRATION
- ▶ BIG AND BRAKED WHEELS
- ▶ LONGOPAC®
- ▶ SELF DISCHARGE VALVE WITH BEST SEALING
- ▶ QUICK REPLACEMENT AND DETACHABLE SYSTEM



MOST FREQUENTLY USE

CONSTRUCTION



HEAVY INDUSTRY



AUTOMOTIVE



INNOVATIONS



CYCLONE
SYSTEM

SPECS



LONGOPAC® COLLECTION
SYSTEM



ADJUSTABLE HEIGHT TROLLEY



SELF DISCHARGE VALVE

TECHNICAL DATA

Code		CYCLONE PRE-SEPARATOR MAXIBAG	
PERFORMANCE		PMVR06389	
Usage		DRY	
Bag capacity	m	20	
Diameter of accessories	mm	50	
Dimensions (LxWxH)	mm	590x590x1300/1100	
Weight	kg	25	

STANDARD EQUIPMENT

CODE: MISC00025
LONGOPAC®



CODE: TBFX00512
FLEXIBLE HOSE
5 m Ø50 mm



OPTIONAL ACCESSORIES

CODE: TBFX01270
CONDUCTIVE FLEXIBLE
HOSE 5 m Ø50 mm



CODE: TBFX00933
CONDUCTIVE FLEXIBLE
HOSE 10 m Ø50 mm



CODE: SPPV49597
RUBBER FLAT LANCE
Ø50 mm



CODE: LAFN49581
COMPLETE ALUMINIUM
DOUBLE WAND Ø50 mm



CODE: SPPV01960
BRISTLE BRUSH Ø50 mm



CODE: KTRI05290
CONDUCTIVE KIT 2
OPERATORS Ø38/60 mm



По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	